

« DSPLC » COMPACT TRUCK BEADBREAKER

Part number : 60308-67

Mechanical beadbearer for hollow base truck wheels with protective valves, steel or alloy rims of type 17.5, 19.5 and 22.5.


These new rims have the following characteristics :

- valve positioned differently = difficult access
- addition of a safety hump.

Tyre removal is very difficult, particularly with regard to the bead.

The DSPLC Compact Truck Beadbearer solves this problem very simply.

It is a swift operation requiring no little effort.

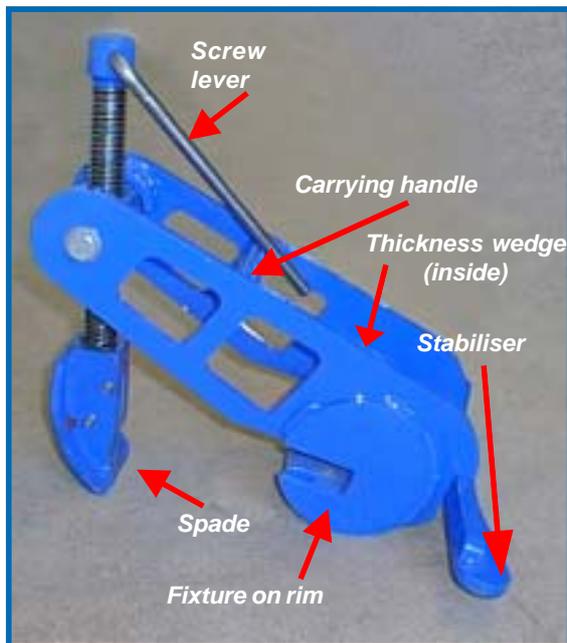

Fitment procedure :

- Start with wheel laid flat, spider facing upwards
- Grease the bead of the tyre at the spot where bead-breaking is desired
- Hook the beadbearer on the edge of the rim
- Screw, while guiding the spade on the flank of the tyre as close as possible to the bead and the edge of the rim
- Stop as soon as the bead crosses the hump
- To remove the appliance, proceed in reverse order
- Alloy rim spiders are thicker than those on metal rims. A thickness wedge fitted with a wing nut is provided for these cases.

Zero inset rims :

Collar adaptable on the DSPLC 60308.



Optional collar :
65003-67

Start up: before using for the first time, fasten the stabiliser with the two hollow supplied screws.

Handling: use the **carrying handle**

Cleaning: **clean and grease** the screw and spade regularly

Schrader s.a.s. - BP 29 - 48, rue de Salins - 25301 PONTARLIER Cedex - FRANCE

☎ standard : +33 (0) 381 38 56 56 - Fax standard : +33 (0) 381 46 41 42 - E-mail : general.info@schrader.fr

Customers & orders services : ☎ +33 (0) 381 38 56 60 / 79 / 24 - Fax +33 (0) 381 38 56 81

E-Mail : resale.info@schrader.fr - www.schrader.fr